

PC
SERIES

FLATWORK IRONERS
QUALITY-ORIENTED EFFICIENCY

PC80
PC120



GIRBAU

LAUNDRY EQUIPMENT

PC SERIES FLATWORK IRONERS

QUALITY-ORIENTED EFFICIENCY

PC80 / 3000
3300
3500



PC120 / 3000
3300
3500



EFFICIENCY AND ROBUSTNESS DESIGNED FOR THE PERFECT FINISH



PRODUCTIVITY

All parameters are adjusted to achieve better results with any kind of item; with speeds up to 50 m/min on the PC120 and up to 45 m/min on the PC80



QUALITY:

All the elements that go to make up the flatwork ironers in the PC series are designed with quality in mind, including the geometry and perfect polished finish of the bed. The combination of an impeccable finish and the latest advances in electronics results in superior ironing quality..



EFFICIENCY:

The high productivity provided by the separate motors for each of the rolls, the high heat transfer coefficient of the bed and the controllable ironing pressure translate into efficiency for your business. In the gas version, a high efficient burner is available.



ROBUSTNESS:

The extremely solid, smart construction of the PC series makes them highly resistant to mechanical stresses and thermal expansion. Everything in the PC series is designed to last. That's the aim of the RIGID TECHNOLOGY, one of the most important features of our construction..



MAINTENANCE:

The machine's optimum design cuts wear on consumables, such as the padding and reduces maintenance work. Moreover, the PC Series are highly accessible, making maintenance tasks easier and shortening work time.

SENSORY QUALITY: SEE IT, FEEL IT

The results of the PC Series go beyond your business balance sheet.

Your customers can appreciate it right from the start, when they see the impeccable finish of a tablecloth or sheet, when they experience the touch on their fingers of a textile with a crisp feel thanks to the quality of the finish. Quality and efficiency of ironing are more than just productivity and profitability.

The PC series adds value to the image of your establishment through the textiles it produces, showing perfection in detail and caring for materials to prolong the life of your establishment's textiles..



EXPERIENCE BASED ON OBSERVATION

Is there anything more perfect than nature? Biomimetics, a discipline that exploits the intelligence of nature to apply it to the design of objects, is a clear answer to this question. In laundry, all the processes represent contrasts.

Going from dirty to clean in the washing area, for example, or from crumpled to the perfect smoothness of ironed fabric. The impression caused by ironing is not unlike looking at a sand dune in the desert with a clean line at the top separating a wavy side from a perfectly smooth side.

The PC Series flatwork ironers express smart, tidy, efficient contrast. PC Series, born out of improvement based on observation.


GIRBAU



COMFORTABLE TEMPERATURES


The thermal insulation* in the covers over the flatwork ironers enable you to save energy, take advantage of heat and achieve higher performance. At the same time, not radiating heat towards the outside makes the environment in the laundry more pleasant, making operators' job easier and maximising their productivity.

*optional

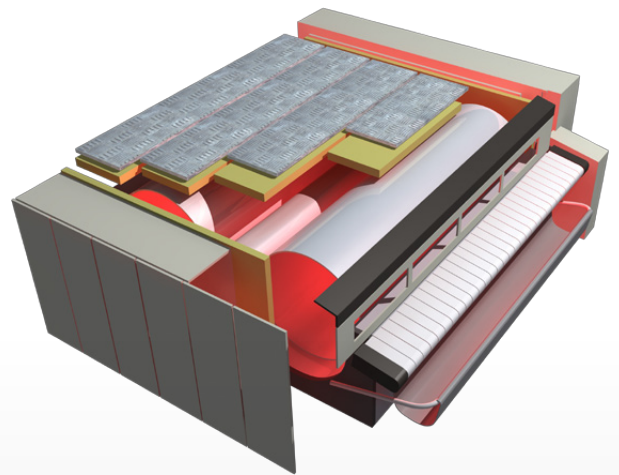


LONGER LIFE, BETTER RETURNS

The PC Series are machines with a long life cycle to ensure uninterrupted working and a return on the cost of the flatwork ironer. Proof of our conviction - based on experience - of their long life is that we offer a 7-year warranty on the bed.

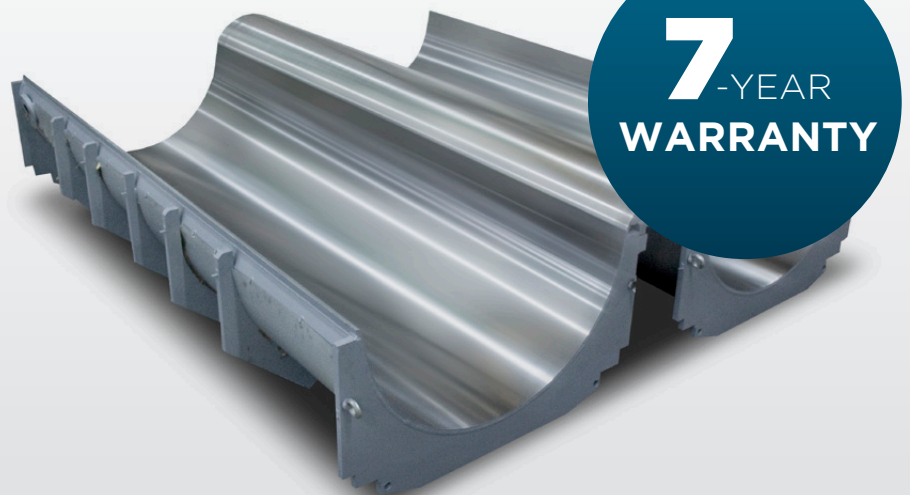

7-YEAR
WARRANTY

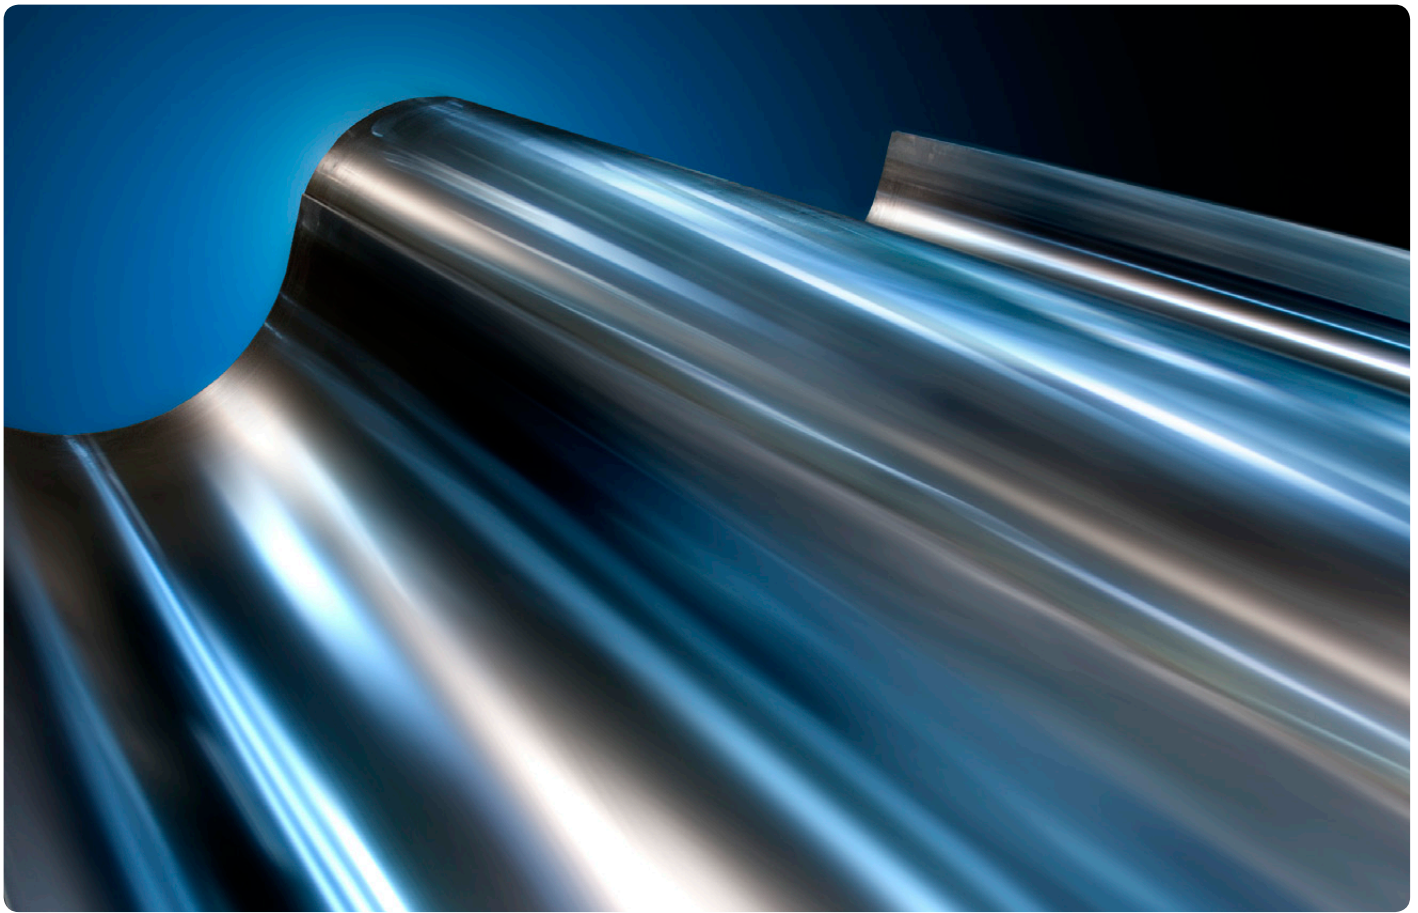

THE GIRBAU RIGID TECHNOLOGY SYSTEM IS BASED ON FOUR KEY FEATURES


1

ROBUSTNESS AND LARGER IRONING SURFACE

Rigid bed known for its robustness and finish: the use of three-dimensional design and parametric simulation technology allows Girbau to offer a bed with a wide fluid passage and a capacity for transmitting heat to fabric that make it possible to iron at high speeds while assuring top quality.

Beds are machined after welding, undergo trials at a test pressure of 20 bar and have a final “mirror effect” **finish applied** to ensure excellent results for ironing.

Larger ironing surface. The flatwork ironers have a larger ironing surface. Even the bridge between the beds is heated to take maximum advantage of the whole surface area, achieving a better quality and a uniform temperature without causing damaging tensions to the linen.

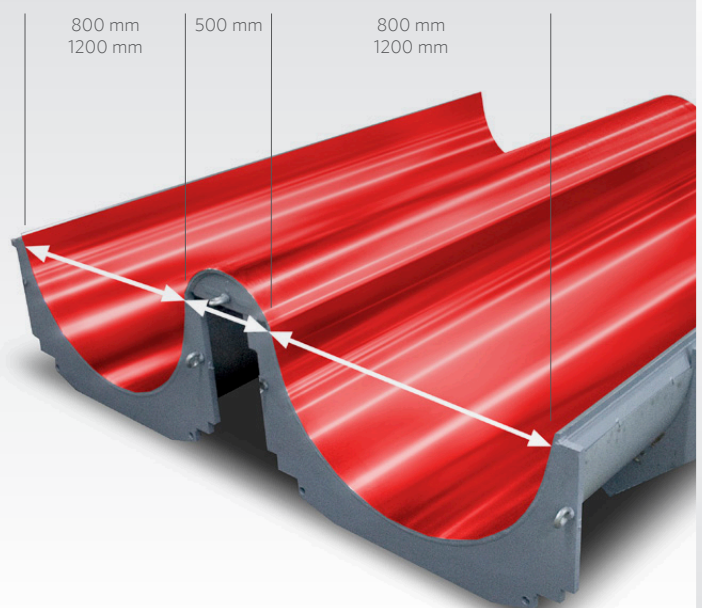





GIRBAU

2

UNIFORM TEMPERATURE

The S-COIL design (with a circuit in coil form) assures uniform heating of the whole ironing surface and a total absence of cold areas.

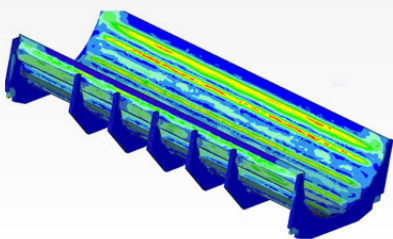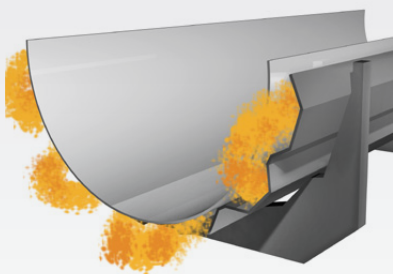


Thermographic image

3

CONSTANT PRESSURE


A pressure gradient with maximum concentration of diametrical pressure ensures high-quality ironing. Lengthwise pressure along the roll is constant in order to keep ironing uniform.

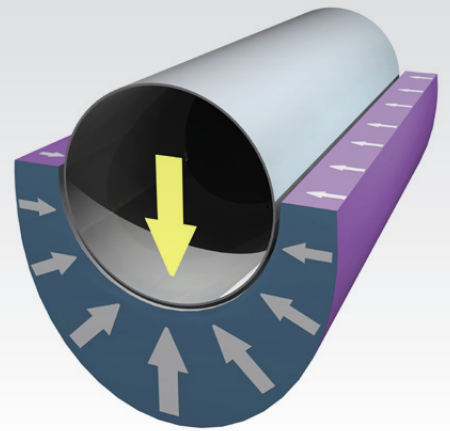

4

SELF-ALIGNMENT

The floating, self-aligning system enables the flatwork ironer to cope with the thermal expansion and mechanical stresses involved, while maintaining a constant pressure distribution over time.

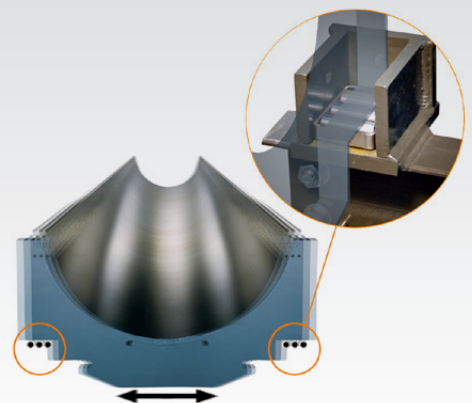



HIGH PRODUCTIVITY

PC Series flatwork ironers are designed for high production.

The maximum standard speed for PC 80 is 35 m/min and with the pressure control option it can achieve speeds of 45 m/min. PC 120 have a standard speed of 50 m/min..

With this control, speeds of up to 45 m/min are achieved and thereby increasing productivity.


EXCELLENT QUALITY CONTROL

Pressure is one of the essential parameters in ensuring a quality finish for good ironing.


This variable can be controlled on PC Series flatwork ironers. The pressure can be set according to the type of textile and ironing requirements*. With this control, speeds of up to 45 m/min are achieved and thereby increasing productivity.

The bed alignment system ensures uniform lengthwise pressure at a point of maximum pressure, giving maximum quality for the type of textile being processed and it is what sets us apart from others.

*optional for PC80

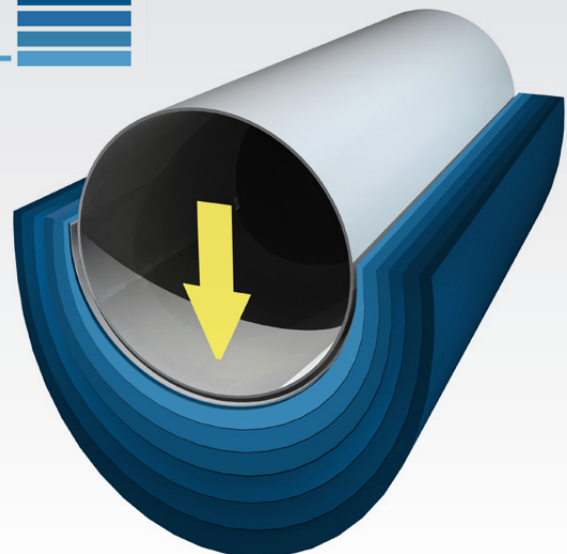

- LOW PRESSURE	HIGH PRESSURE +
<ul style="list-style-type: none"> • Longer padding life • Reduced mechanical fatigue • Lower power consumption by motors • Longer life for textiles 	<ul style="list-style-type: none"> • Higher capacity • Increased drying capacity

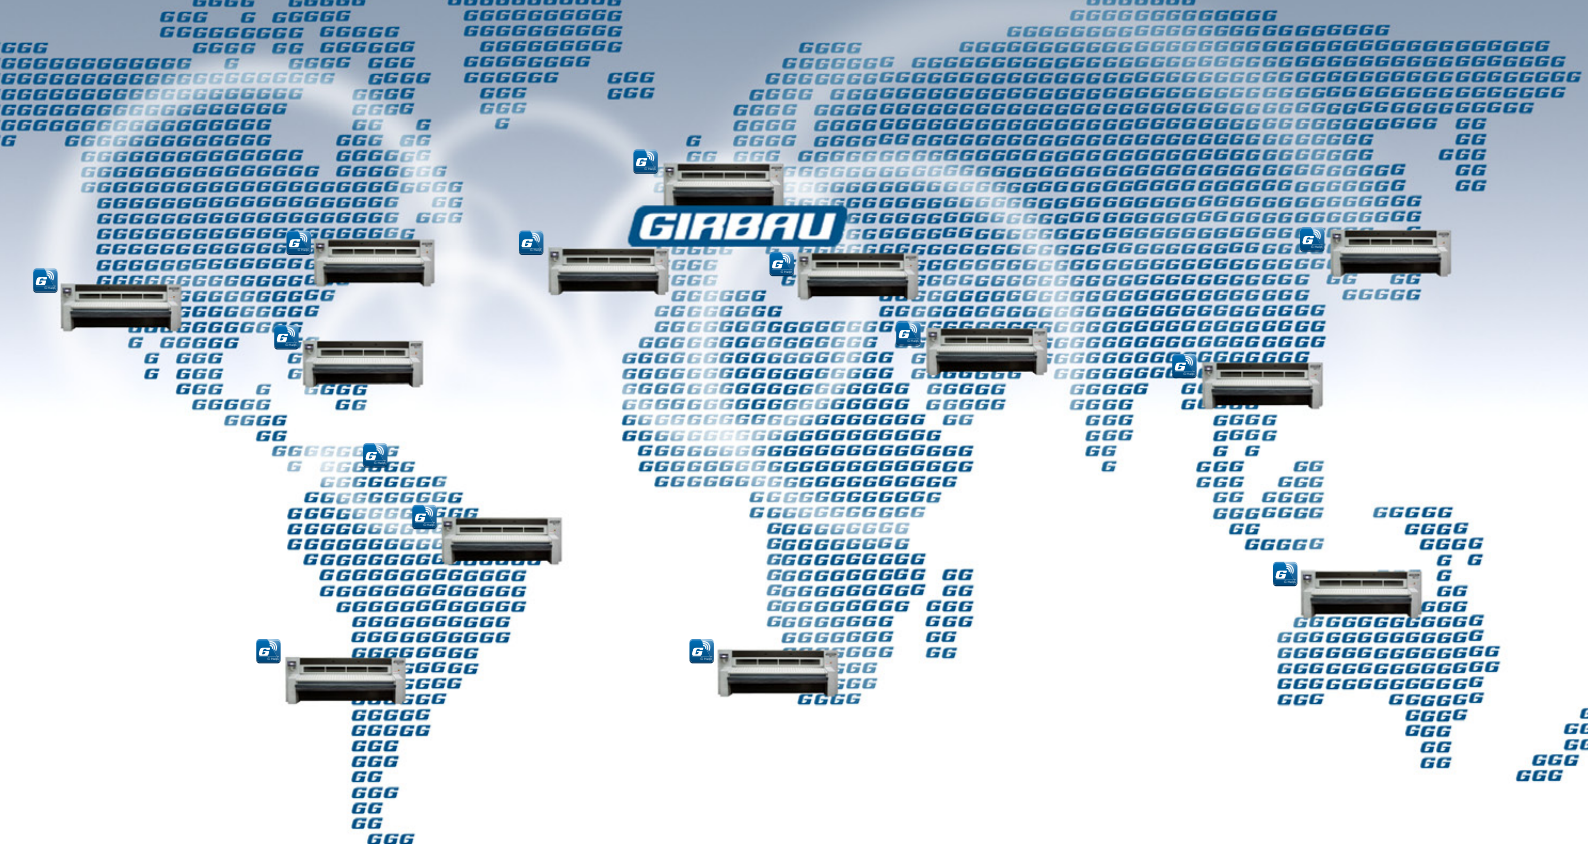

GIRBAU



PROXIMITY AND SPEED

Being fast, efficient and agile is essential to your business.

Proximity to the customer is vital to Girbau, as we realise that this is a key value for any laundry.

As well as being backed by a sales and technical network in more than 90 countries around the world, ready to act quickly and effectively, all PC series flatwork ironers can feature a remote connection,*

so gaining time and efficiency. Diagnostics can be conducted remotely, with no need to travel.

Information can be captured to analyse productivity, incidents and hours of operation.

The goal: to gain time and productivity. And above all, to gain peace of mind for you and for your business.

*Optional.



Assisting its customers has been and remains one of Girbau's central principles. A wide range to meet the needs of every customer, geographical expansion for closeness, technologies to speed up processes and contact and more.

The success of your business is our goal, our success.

GROWING TOGETHER



EASY MAINTENANCE



DIRECT TRANSMISSION

The gear motors transmit power to each roll independently and are electronically controlled through latest-generation encoders and inverters that allow the roll speed and the relative speed between them to be adjusted.

Connected via a communications network, they are synchronised with one another in a perfect mechanical transmission system. The transmission requires no mechanical components, so it takes up less space and is easy to maintain.

ACCESSIBILITY AND SAFETY:

Everything in the PC Series is designed to meet all standards for safety and ease of access. The flat top structure makes it highly accessible to enable the maintenance works-. Cleaning the filter is extremely easy. The new look of the casing hides a more ergonomic, accessible, lighter and is easier to take out for maintenance work.

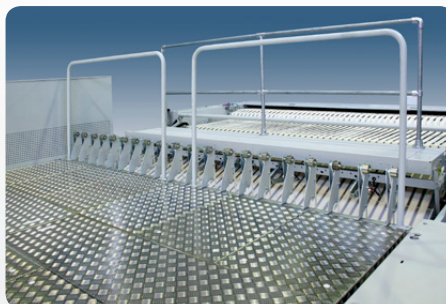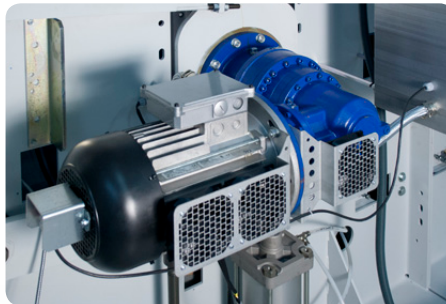

PLUG & PLAY, EASY INSTALLATION

The structure of PC Series flatwork ironers is designed to make both delivery and installation easy.

Start-up is agile, fast and simple, thereby optimising the installation time.

There's no time to lose in your business!





GIRBAU

VERSATILITY IN HEATING SYSTEMS, ALL WITH MAXIMUM EFFICIENCY

GAS

The 93% efficiency of the gas boiler in the PC Series is achieved thanks to the following:

- A **spacious combustion chamber**: the flame never touches the pipes, to avoid cracking.
- **Multipiping**: the oil circulates through four distinct sets of piping, achieving a higher heating surface area and therefore improved efficiency.
- **Three steam passages**: steam circulates in three ways (flame, between pipes, return). This takes advantage of the temperature of the steam which, through exchange, gives better heating efficiency.



STEAM AND THERMAL OIL

PC Series flatwork ironers are also available in steam and thermal oil heated versions.

The steam version features temperature* control, so that it can be set depending on the type of cloth to be ironed.

*Option



TECHNOLOGY FOR IMPROVED CONTROL

Setting the ironing parameters easily to meet your requirements is the best way to achieve the desired results and be more efficient..

The PC80 flatwork ironer features PLC technology so that you have maximum control over the process. You can have a programme for each customer or each need. Capacity for 100 programmes allows maximum personalisation of your ironing.

The Girbau flatwork ironing system connectivity software helps you to control all the features of the system for improved control.

INTELI CONCEPT

Working with the controls of any of the flatwork ironers in the PC Series is extremely easy. The controls feature the Inteli Concept language created by Girbau.

A highly intuitive system of icons means any operator can understand quickly how the machine works.



+ EASY PROGRAMM SETTING

+ EASY TO UNDERSTAND

- MISTAKES



PC120 INTELI

The PC120 features Inteli control, enabling you to set all the ironing parameters conveniently and precisely.



OPTIONS

	PC80	PC120
Ironing pressure control Allows ironing pressure to be set and adjusted, and increasing the speed.	✓	STANDARD
Modem (connection with factory) Allows remote connection from the factory.	✓	nov-14
Extra insulation (sides and bed-frame) Additional insulation on all sides of the machine. Enhances the efficiency of the machine and the comfort of the operators as it keeps the heat inside it.	✓	nov-14
Stainless steel article support tray and manual machine stop pedal (1 roll) To feed in high-quality table linen slowly	✓	✓
Pressure switch and vapour exit monitoring temperature probe For an exhaustive analysis of steam extraction and more precise diagnosis.	✓	nov-14
Temperature control (STEAM ironer) Steam pressure regulating valve making it possible to control the temperature of the bed.	✓	nov-14
Extra for scrapers (1 roll) Used with high-quality table linen.	✓	✓
Anti oil leak collector Holding hopper to collect all possible leakages of oil.	✓	nov-14
Pneumatic anti roll drop protection Check valve to keep the rolls up (not for carrying out maintenance).	✓	nov-14
Output table (only where no folder is installed)	✓	✓
Girbau ironing system connection Inter-connection between Girbau machines.	✓	nov-14
LAM-PRESS (leaf-type) springs Stainless steel leaf springs	✓	nov-14
NOMEX padding (Steam pressure only) (Gas and thermal oil heating as standard). Standard padding for steam ironers in POLYESTER..	✓	✓
Wood cage packaging Standard packaging is wooden pallet + plastic film.	✓	✓
Natural gas other than G20	✓	✓
Propane gas	✓	✓
Special voltage (other than 380-400V/50Hz)	✓	✓

Todas estas opciones son de origen fábrica.

SAFETY

All Girbau equipment fulfill the highest safety standards

2006/42/EC Machine Directive

2006/95/EC Low voltage Directive

2004/104/EC Electromagnetic Compatibility Directive

97/23/EC Pressure Equipment Directive

2009/142/EC Gas Appliance Directive

IRONING SYSTEM

To achieve high output of high-quality ironing, two basic requirements must be met: having the equipment necessary to set up the right ironing system to meet your needs, and ensuring maximum synchronisation between them.

This is why Girbau offers you a range of options, not only in flatwork ironers but also in feeders and folders to complete the flatwork ironing system.

Our extensive range of equipment means we can be sure that we have the ironing solution best suited to your business.



DR SERIES FEEDERS THE IDEAL SOLUTION FOR IRONING



DRF

An automatic front feeder to deal with pieces of all kinds and sizes (King or Queen size sheets, duvet covers, bedspreads and so on).
2, 3 and 4 working stations.



DRF LITE

An automatic front feeder to feed in large pieces in 1 automatic lane and small pieces manually or directly into the flatwork ironer.
2 and 3 working stations.



DRB

Automatic front feeder. Allows a wide variety of types of linen to be fed in automatically, and small pieces manually.
2 working stations. It requires a pit



DR1

Extremely simple automatic feeder for automatic feeding in of pieces in 1 lane. The feeder top can be moved to allow manual feeding of items of all sizes on 1, 2 or 4 lanes.



DRM

Extremely simple manual feeder for manual feeding in of pieces in 1 lane. It also allows manual feeding of items of all sizes on 1, 2 or 4 lanes.



DR SERIES FEEDERS
FEEDING SOLUTIONS

GIRBAU
LAUNDRY EQUIPMENT

See feeders brochure



FL SERIES FOLDERS



FL KING

Folder for King Size pieces with maximum quality of finish. 1, 2 or 4 lanes. It performs up to 3 primary folds and 3 cross folds



FL SMART

1, 2 or 4-lane folder for pieces up to 3.6 m long. Makes two primary folds.



FL LITE

1, 2 or 4-lane folder. It performs 2 primary folds with the possibility of a third one (optional) and 3 cross folds.




See folders brochure

PC SERIES FLATWORK IRONERS

PC80

MODEL		PC 8030/1	PC 8033/1	PC 8035/1	PC 8030/2	PC 8033/2	PC 8035/2	PC 8030/3	PC 8033/3	PC 8035/3
Cylinder Nr		1			2			3		
Heating surface	m ² (sq.ft)	3,71 (39.9)	4,08 (43.9)	4,33 (46.6)	9,28 (100)	10,21 (110)	10,83 (116.6)	14,85 (159.8)	16,34 (176)	17,33 (186.5)
Ø Cylinder	mm (in.)	800 (31.5)								
Cylinder length	mm (in.)	3000 (118.1)	3300 (129.9)	3500 (137.8)	3000 (118.1)	3300 (129.9)	3500 (137.8)	3000 (118.1)	3300 (129.9)	3500 (137.8)
Speed	m/min (ft/min)	5 - 35/45 (16.4 - 114.8/147.6)						5 - 45 (16 - 147)		
Air flow V - AT - G	m ³ /h (c.f.m.)	1080 (635)			2160 (1271)			3240 (1907)		
Fumes flow - G	m ³ /h (c.f.m.)	455 (268)			663 (390)			-		
Heating power AT	kW (B.T.U./h)	155 (528.5)	170 (579.7)	180 (613.8)	225 (767.25)	250 (852.5)	265 (903.6)	385 (1312.8)	425 (1449.2)	450 (1534.5)
Heating power G	kW (B.T.U./h)	170 (580.0)			250 (853.0)			-		
Steam flow	kg/h (lbs/h)	285 (629)	310 (684)	330 (728)	410 (904)	455 (1004)	485 (1070)	705 (1555)	775 (1709)	820 (1809)
Hot oil flow	l/min (Usgal/min)	520 (138)	575 (152)	605 (160)	760 (201)	845 (224)	895 (237)	1300 (344)	1435 (371)	1515 (401)
Motors power V - AT (50 Hz)	kW	1,1/1,1 5,5			1,1/ 2x1,1 2x5,5			1,1/ 3x1,1 3x5,5		
Motors power G (50 Hz)	kW	1,1/1,1 5,5/4/0,55			1,1/2x1,1 5,5/4/0,55			-		
Ø Steam exhaust V - AT - G	mm (in.)	250 (9.8)								
Ø Fumes exhaust G	mm (in.)	200 (7.9)						-		
Ø Steam Ø Return	in. (mm)	2" (50,8) 1 1/2" (38,1)								
Ø Hot oil Ø Return	in. (mm)	3" (76,2) 3" (76,2)						4" (101,6) 4" (101,6)		
Ø Compressed air	in. (mm)	1/2" (12,7)								
Net Weight V-AT	kg (lbs.)	3415 (7529)	3670 (8091)	3840 (8466)	6785 (14957)	7300 (16094)	7645 (16865)	10285 (22675)	11060 (24384)	11580 (25530)
Net Weight G	kg (lbs)	4675 (10307)	4930 (10868)	5100 (11243)	8055 (17759)	8570 (18894)	8915 (19655)	-		
Height V-AT H	mm (in.)	1530 (60.2)								
Height G H	mm (in.)	2363 (93)								
Width L	mm (in.)	4400 (173.1)	4700 (184.9)	4900 (192.8)	4400 (173.1)	4700 (184.9)	4900 (192.8)	4400 (173.1)	4700 (184.8)	4900 (192.8)
Depth V - AT P	mm (in.)	2360 (92.8)			3675 (144.6)			4990 (196.3)		
Depth G P	mm (in.)	2628 (103.4)			3943 (155.1)			-		


V - Steam version
AT - Hot oil version
G - Gas version

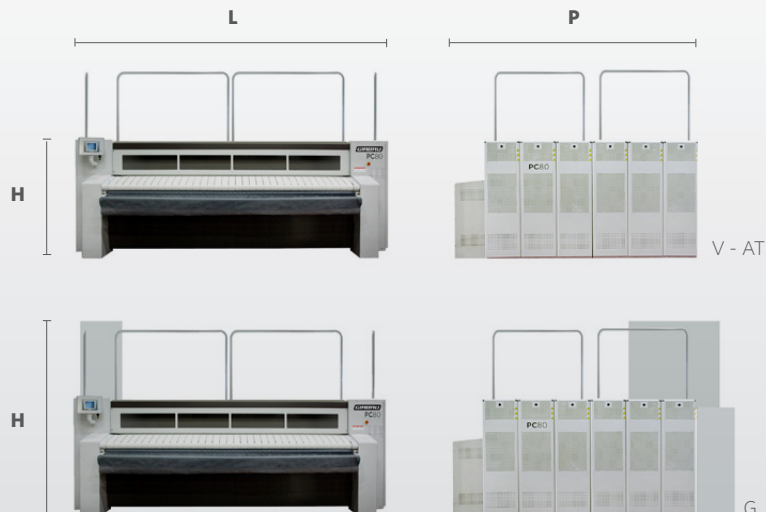

PC120

MODEL		PC 12030/1	PC 12033/1	PC 12035/1	PC 12030/2	PC 12033/2	PC 12035/2	PC 12030/3	PC 12033/3	PC 12035/3
Cylinder Nr.		1			2			3		
Heating surface	m ² (sq.ft.)	5,56 (118.1)	6,12 (65.9)	6,49 (69.9)	13 (139.9)	14,28 (153.7)	15,16 (163.2)	20,41 (219.7)	22,44 (241.5)	23,82 (256.4)
Ø Cylinder	mm (in.)	1200 (47.2)								
Cylinder length	mm (in.)	3000 (118.1)	3300 (129.9)	3500 (137.8)	3000 (118.1)	3300 (129.9)	3500 (137.8)	3000 (118.1)	3300 (129.9)	3500 (137.8)
Speed	m/min (ft/min)	5 - 50 (16-164)								
Air flow V - AT - G	m ³ /h (c.f.m)	1650 (971)			3300 (1,942)			5000 (2,943)		
Fumes flow - G	m ³ /h (c.f.m)	663 (390)			1325 (780)			-		
Heating power AT	kW (BTU/h)	232 (791.6)	255 (870)	270 (921.2)	405 (1381.9)	445 (1518.4)	470 (1603.7)	545 (1859.6)	600 (2047.2)	636 (2170.1)
Heating power G	kW (BTU/h)	250 (853.0)			500 (1706.0)			-		
Steam flow	kg/h (lbs/h)	423 (933)	465 (1025)	493 (1087)	735 (1620)	812 (1790)	850 (1874)	995 (2194)	1096 (2416)	1162 (2562)
Hot oil flow	l/min (Usgal/min)	782 (207)	860 (227)	910 (240)	1365 (361)	1500 (396)	1585 (419)	1840 (486)	2025 (535)	2145 (567)
Motors power V - AT (50 Hz)	kW	0,9 / 1,1 / 11			0,9 / 2x1,1 / 2x11			0,9 / 3x1,1 / 3x11		
Motors power G (50 Hz)	kW	0,9 / 1,1 / 11 / 4,6			0,9 / 2x1,1 / 2x11 / 11,6			-		
Ø Steam exhaust V - AT - G	mm (in.)	250 (9.8)								
Ø Fumes exhaust G	mm (in.)	200 (7.9)			250 (9.8)			-		
Ø Steam Ø Return	in. (mm)	1½" (38,1) 1½" (38,1)			2" (50,8) 1½" (38,1)					
Ø Hot oil Ø Return	in. (mm)	3" (76,2) 3" (76,2)								
Ø Compressed Air	in. (mm)	½" (12,7)								
Net weight V - AT	kg (lbs.)	5145 (11343)	5750 (12677)	6100 (13448)	10215 (22520)	11370 (25067)	12085 (26643)	15285 (33698)	16990 (37457)	18070 (39838)
Net weight G	kg (lbs.)	6470 (14264)	7030 (15498)	7400 (16314)	12358 (27245)	13465 (29685)	14198 (31301)	-		
Height V- AT H	mm (in.)	1850 (72.8)								
Height G H	mm (in.)	2685 (105.7)						-		
Width L	mm (in.)	4353 (1714)	4653 (183.2)	4853 (191.1)	4353 (171.4)	4653 (183.2)	4853 (191.1)	4353 (171.4)	4653 (183.2)	4853 (191.1)
Depth V - AT P	mm (in.)	2757 (108.5)			4475 (176.2)			6193 (243,8)		
Depth G P	mm (in.)	3008 (118.4)			4846 (190.8)			-		

V - Steam version
AT - Hot oil version
G - Gas version

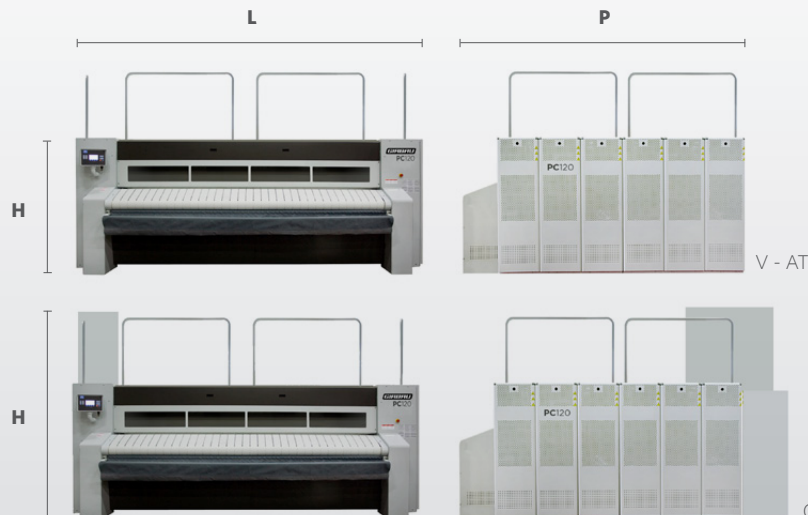



E&B

EASY & BEST SOLUTIONS

EASY AND SUSTAINABLE SOLUTIONS

We propose a new way of working, aimed at achieving the best solution in the easiest way possible.

Just let us know your production requirements. We will take care of the rest.

Easy and best.



See video

BRANCHES

- Argentina - Buenos Aires - Tel. +54-1 149017600 - girbauargentina@girbau.com.ar
- Australia - Castle Hill, Sydney - Tel. +61298940399 - sales@girbau.com.au
- Brazil - Sao Paulo - Tel. +55 11-29820446 - girbaudobrasil@girbau.com.br
- China - Shenzhen & Hong Kong - Tel. +86-755-8211 1330 - info@girbau.com.cn
- Cuba - La Habana - Tel. (+53-7) 8662071 al 73 - girbau@girbau.co.cu
- Dominican Rep. - Punta Cana - Tel. +1 809-959-0615 - info@girbau.do
- France - Roissy (Paris) - Tel. +33 1-49388585 - info@girbau.fr
- Germany - Hannover - Tel. +49-511 60099389 - girbau@girbau.de
- Italy - Marcon (VE) - Tel. +39 0418654330 - info@girbau.it
- Portugal - Porto - Tel. +351 22 3758909 - vendasportugal@girbau.pt
- U.A.E. - Dubai - Tel. +971 4-8839951 - sales@girbau.ae
- U.K. - Hitchin - Tel. +44(0)-1462 427780 - info@girbau.co.uk
- U.S.A. - Oshkosh, WI & Los Angeles, Ca - Tel. +(1920) 2318222 - info@continentalgirbau.com

HEADQUARTERS

GIRBAU, S.A. Ctra de Manlleu, km. 1 - 08500 Vic (Barcelona) Spain - www.girbau.com
 Tel. (+34) 93 886 2219 - Fax (+34) 93 886 0785 - sales@girbau.es

